

english

MICROSENS

fiber optic solutions

Optical Transport
CWDM / DWDM



Optical
Transport
Networks

CWDM
DWDM


Wavelength Division Multiplexing

High capacities and the increasing bandwidth demand through Metro Access and Enterprise network applications such as GbE, SAN, Video on demand or Storage over IP at the access site, are pushing the end user bandwidth needs far beyond the existing limits at this "First Mile".

Today, the focus on this "First Mile" applications have dramatic influenced the technology used in the past, to achieve the highest cost optimization in terms of investment cost (Capex) and operation costs (Opex).

Coarse Wavelength Multiplexing Technology (CWDM) offers the most cost efficient solutions for this Metro Access and Enterprise applications where additional bandwidth is required over the existing Fiber infrastructure.

WDM-Technology

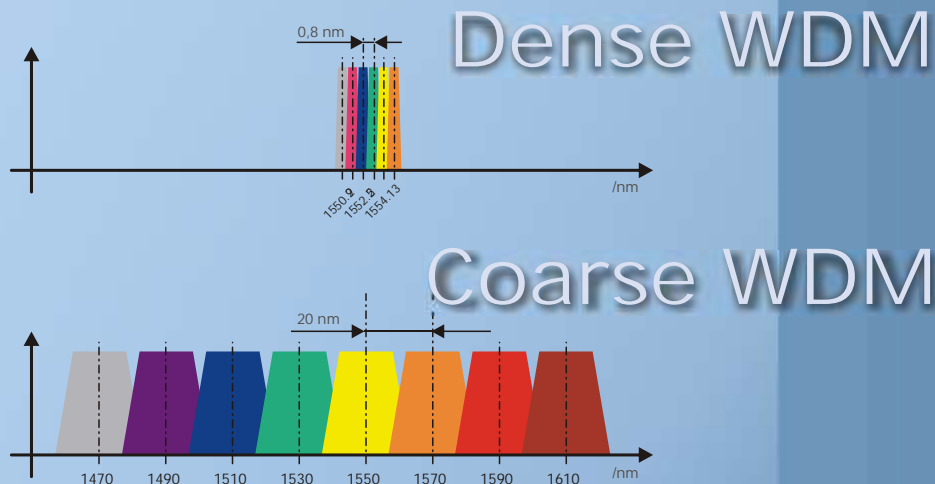

The parallel transmission of multiple channels on a single fiber using different wavelengths for each channel offers a nearly unlimited increase in transmission capacity for fiber optic networks.

Modularity


ITU G.694.2

Scalability

Flexibility

Pay as you grow...


To ensure the highest flexibility and economical effectiveness, optical multiplexers must be designed in that way, that the capacity can grow together with bandwidth demands.

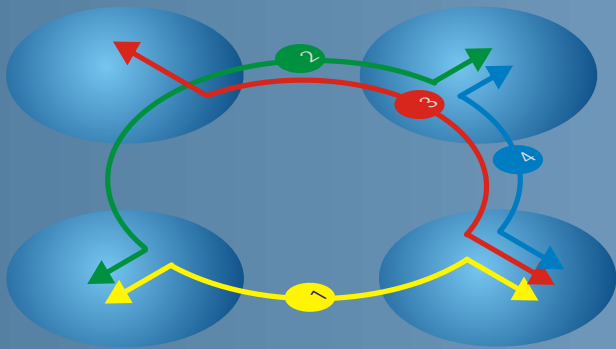

A modular approach at channel level gives the flexibility to add transmission channels to increase capacity on demand.

The optical add/drop multiplexers, which can be integrated into the system, allow flexible network structures from point-to-point to meshed ring topologies.

Users will only invest in the transmission capacity actually required. The number of channels can easily be expanded at any time.

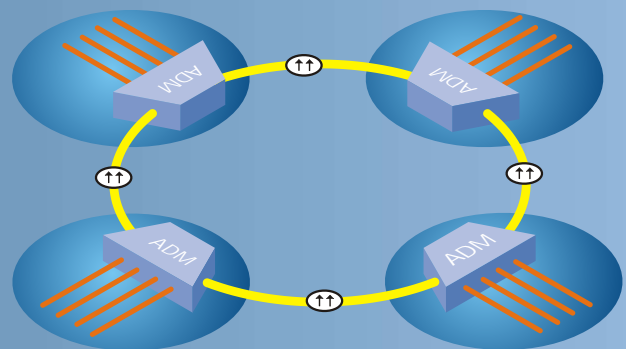

Protection

Automatic optical path and channel protection can optionally be installed for maximum fail-safe systems.

The status of each transmission channel is monitored by a centralized management module. Alarm messages are generated automatically when components fail.



Multifunctional CWDM/DWDM

The use of the CWDM technology permits the construction of cost effective wavelength multiplexers.

The multifunctional system in a very compact design can transmit up to eight independent high-speed services via a fiber optic route. Optimized design allows an optical budget for transmission distances of up to 100 km.

Due to the transparent transmission, different protocols such as Fast Ethernet, SDH/Sonet, STM-1, STM-4, Gigabit Fibre Channel, Gigabit Ethernet and STM-16 may be used.

This system provides very low initial cost since its modularity allows to install only the number of channels that are actually used.

For increased availability requirements, optional line, channel, and system protection can be provided.

The local optical interfaces of the individual data channels are designed as pluggable transceiver modules (SFP's - Small Form Factor Pluggable.)



MICROSENS

fiber optic solutions

xWDM Platform 2.5 Gbps/channel



Modular Chassis System

The modular CWDM/DWDM system, joins MICROSENS existing modular access platform. This flexible system fits to the needs of telecommunications providers, metropolitan carriers or sophisticated backbone applications.

- 19" chassis 4/7 HU with 28/56 module slots
- Compact desktop chassis options
- Easy migration from access platform to xWDM
- Supports Fast Ethernet, GbE, OC-3/OC-12/OC-48, ESCON, FICON and 1x/2x Fibre Channel
- Optical budget covers distances up to 100 km
- SNMP management module with web based management and Telnet
- Provides full 3R signal regeneration for longer distances

The modular construction provides maximum flexibility for configuration, expansion and maintenance.

The system supports a multitude of functionality modules, including protocol-transparent converters, wide-range retimers for full signal conditioning, optical multiplexers and demultiplexers, line-protection modules and add/drop multiplexers.

Channel protection with free programmable 4-Channel Crossbar

Highest system availability with redundant power-supply modules and automatic controlled fan system.





Headquarters



MICROSENS GmbH & Co. KG
Kueferstr. 16, D-59067 Hamm / Germany
Tel.: +49 2381-9452-0, Fax: +49 2381-9452-100

Representative Offices



Western Europe Representative Office
ZA Eurocampus Bât I, 3, rue de Verdun,
78590 Noisy le Roi / France
Tel.: +33 1-30 80 21 73, Fax: +33 1-30 80 44 83



Eastern Europe Representative Office
ul. Ślężna 187/S-2, PL 53-110 Wrocław / Poland
Tel.: +48 71-337 16 71, Tel./Fax: +48 71-337 16 72



Asia Pacific Representative Office
25 International Business Park, #03-108 German Centre,
Singapore 609916 / Singapore
Tel.: +65 65 62 91 32, Fax: +65 65 62 91 35

Your local Partner:

www.microsens.com